




Fold-flat gift divider grid

Tray net / keep every corner tab

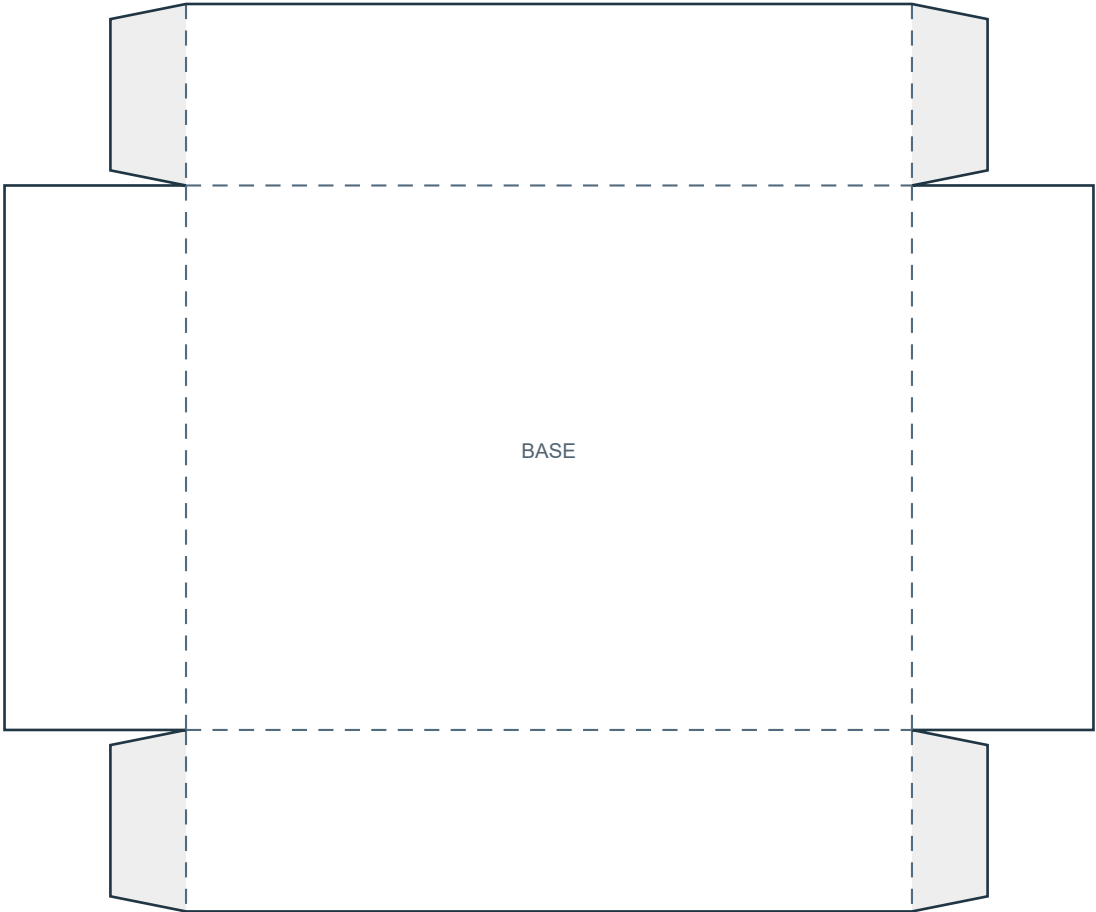

Fold-flat gift divider grid

Liner and internal pieces / do not trim parts to force a fit

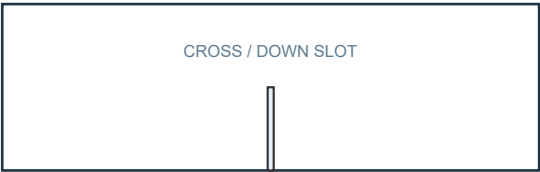

Fold-flat gift divider grid


Assembly and use / Print at actual size / Make a plain-paper trial

MAKE THE PROJECT

Make a shallow tray with a removable six-compartment divider grid: one long divider crossed by two shorter dividers.

YOU WILL NEED

Plain paper for a trial; light card if suitable; ruler, scissors, blunt creasing tool and paper adhesive.

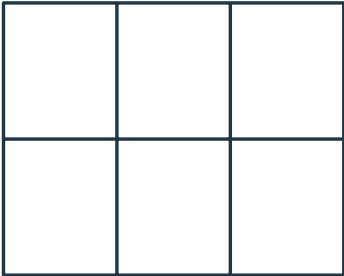

SIX COMPARTMENTS / TOP VIEW

- 01 Print all matching pages at 100%. Measure a 50 mm reference. Cut solid outer outlines; keep joining tabs and score dashed folds.
- 02 Cut the tray outline with all four corner tabs and the separate LINER. Score around BASE and along each corner-tab fold.
- 03 Raise the four walls around BASE. Fold the corner tabs inward and glue each tab to the inside of its adjacent wall.
- 04 Square the tray and let the joins dry. Place LINER on the inside base; attach it only after checking that it lies flat.
- 05 Cut the two slots down from the long divider's top edge. Cut the central slot up from each cross divider's bottom edge.
- 06 Slide each cross divider down into one long-divider slot until their top edges align. Place the grid in the tray: it creates two rows of three cells.

The slots are 0.8 mm wide. Check your card thickness before assembly. Keep dividers unglued if you want to disassemble the grid for storage.