



Folded Display Easel paper construction project

ex2-1221 / A4 / Parts overview - NOT A CUTTING SHEET



USE THE FOLLOWING PATTERN SHEETS AT ACTUAL SIZE.

These miniature views identify the supplied patterns; they are deliberately reduced.

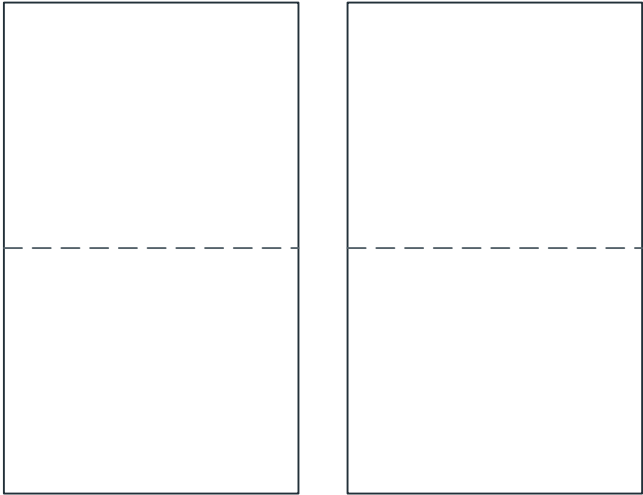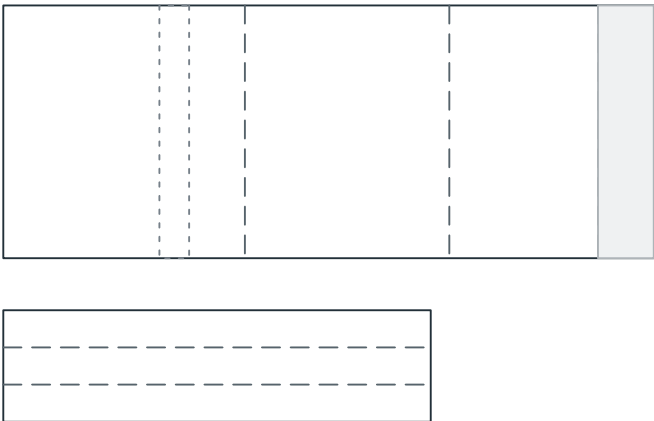


1. Pattern 1

2. Pattern 1

2 pattern sheets supplied. Printed details are not cut lines unless explicitly marked.

Solid cut boundary / dashed score / shaded joining area. Read the full instructions.

Dry-fit the parts before gluing. Keep this overview beside the full-size pattern sheets.




Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

Folded Display Easel paper construction project


ex2-1221 / A4 / Pattern 1



Folded display easel

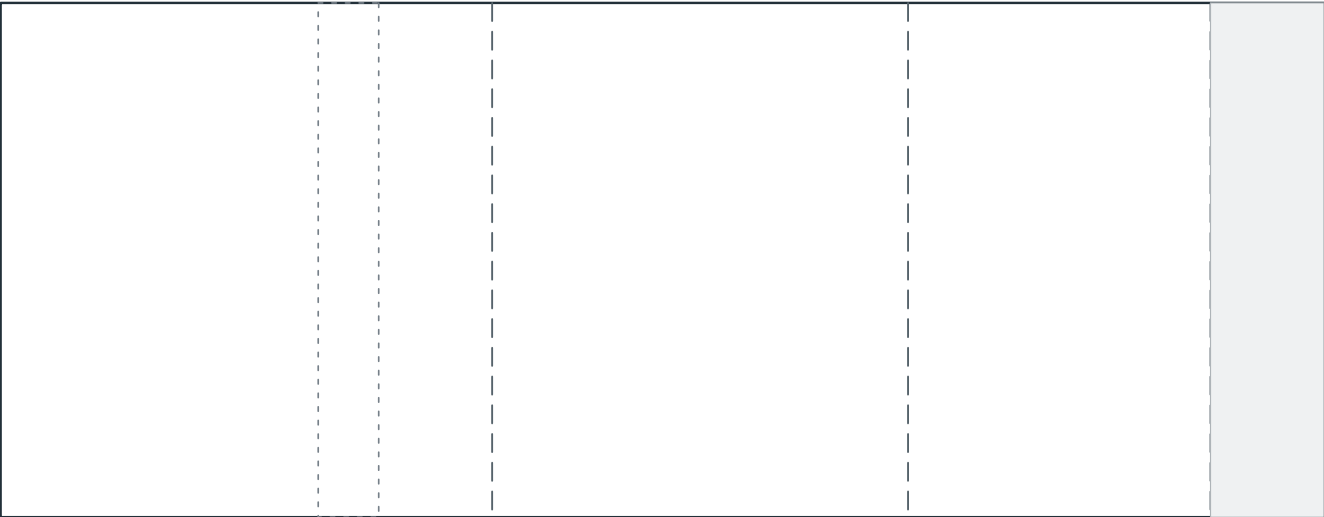

Display ledge





Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

Folded Display Easel paper construction project

ex2-1221 / A4 / Pattern 1

Grouped variation companion

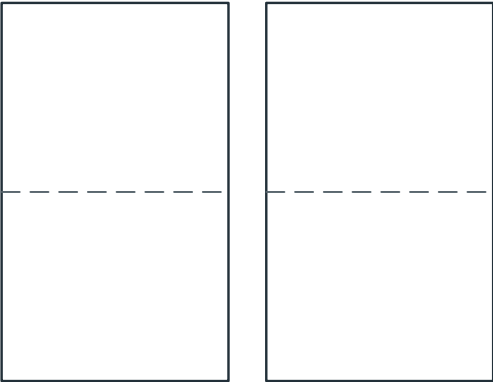

Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

Folded Display Easel paper construction project

ex2-1221 / A4 / Instructions

PURPOSE

Folded Display Easel paper construction project developed as a measured original paper study. The packet provides the actual parts, joining or shaping marks, drawing dimensions and an assembly sequence. Print at actual size and dry-fit the parts before gluing.

DRAWING FACTS

- Triangular support: 65/55/40 mm panels, 68 mm wide; folded ledge 115 x 30 mm.

MATERIALS


Plain 100 to 140 gsm paper for a first dimensional trial; approximately 160 to 220 gsm card only after confirming the folds. Use a ruler, suitable scissors, a blunt scoring tool and a small amount of paper adhesive. An adult should handle internal cuts, holes and small fasteners.

HOW TO USE THESE PAGES

1. Score all panel hinges and form the triangular support, joining only the 15 mm seam.
2. Fold the ledge into a shallow U and bond its rear flange to the front support panel.
3. Trial with a lightweight paper display; no rated load or protective photo-storage performance is claimed.
4. Two 30 x 50 mm folded rear brace studies supplement the triangular easel.

LIMITS AND CHECKS

- Drawing dimensions describe flat paper surfaces, not verified internal capacity, load strength, fit or material compatibility.
- No mailing, food-contact, archival, toy-safety, protective-wear or cutting-machine certification is supplied.
- Make a plain-paper trial first; paper thickness and fold accuracy can change the fit.
- Trial: Measure the 50 mm reference and two named component dimensions.
- Trial: Make a complete empty trial and document fold direction, joining order, collision, stability and any fragile features.
- Trial: Repeat the trial using your chosen paper. Check that every join holds and each moving part works freely before decorating.



50 mm print check

Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.