

Notebook Bellyband package specialty project

ex2-1262 / LETTER / Parts overview - NOT A CUTTING SHEET

USE THE FOLLOWING PATTERN SHEETS AT ACTUAL SIZE.

These miniature views identify the supplied patterns; they are deliberately reduced.



1. Pattern 1

1 pattern sheet supplied. Printed details are not cut lines unless explicitly marked.

Solid cut boundary / dashed score / shaded joining area. Read the full instructions.

Dry-fit the parts before gluing. Keep this overview beside the full-size pattern sheets.






Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

Notebook Bellyband package specialty project

ex2-1262 / LETTER / Pattern 1

Bellyband

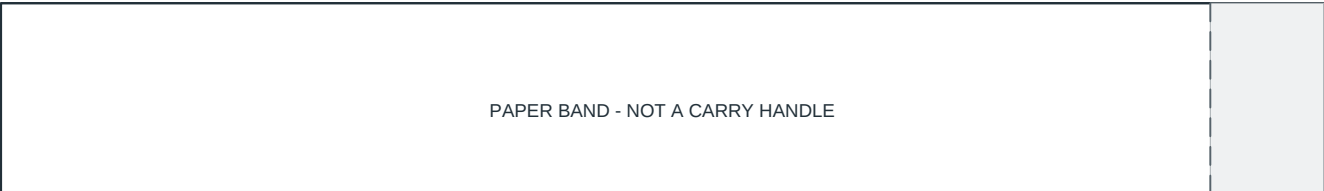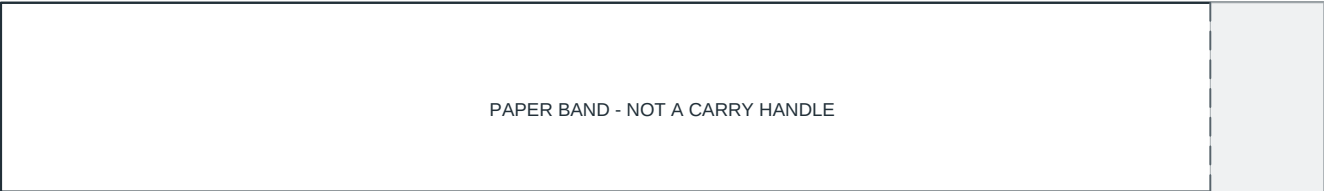

Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

Notebook Bellyband package specialty project

ex2-1262 / LETTER / Instructions

PURPOSE

Notebook Bellyband package specialty project developed as a fixed-size paper pattern with separate cut, fold and joining marks. Use the stated drawing sizes and make an empty trial before choosing material or contents.

DRAWING FACTS

- Band strips: two 175 x 25 mm pieces with 15 mm end overlap.

MATERIALS

Plain paper for a first trial, a ruler, scissors and a blunt scoring tool; adult help for internal cuts.

HOW TO USE THESE PAGES

1. Cut the two 175 x 25 mm strips. Use one strip for each small trial item.
2. Wrap a strip around the item and overlap its last 15 mm behind the other end. Glue only the paper-to-paper overlap, keeping the item clear.
3. Slide the dried band off and on without forcing it. One closed band has a nominal 160 mm inner path before paper thickness.

LIMITS AND CHECKS

- Nominal drawing dimensions are not a tested usable-capacity, load, mailing, food-contact or archival specification.
- Do not place valuable, wet, hot or breakable items in an unreviewed paper prototype.
- Trial: Measure the 50 mm reference and at least two named panel dimensions.
- Trial: Assemble an empty plain-paper trial; record closure, seam, clearance and material behavior.



50 mm print check

Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.