


Vellum invitation wrap pattern

gif-045 / A4 / Parts overview - NOT A CUTTING SHEET

USE THE FOLLOWING PATTERN SHEETS AT ACTUAL SIZE.

These miniature views identify the supplied patterns; they are deliberately reduced.

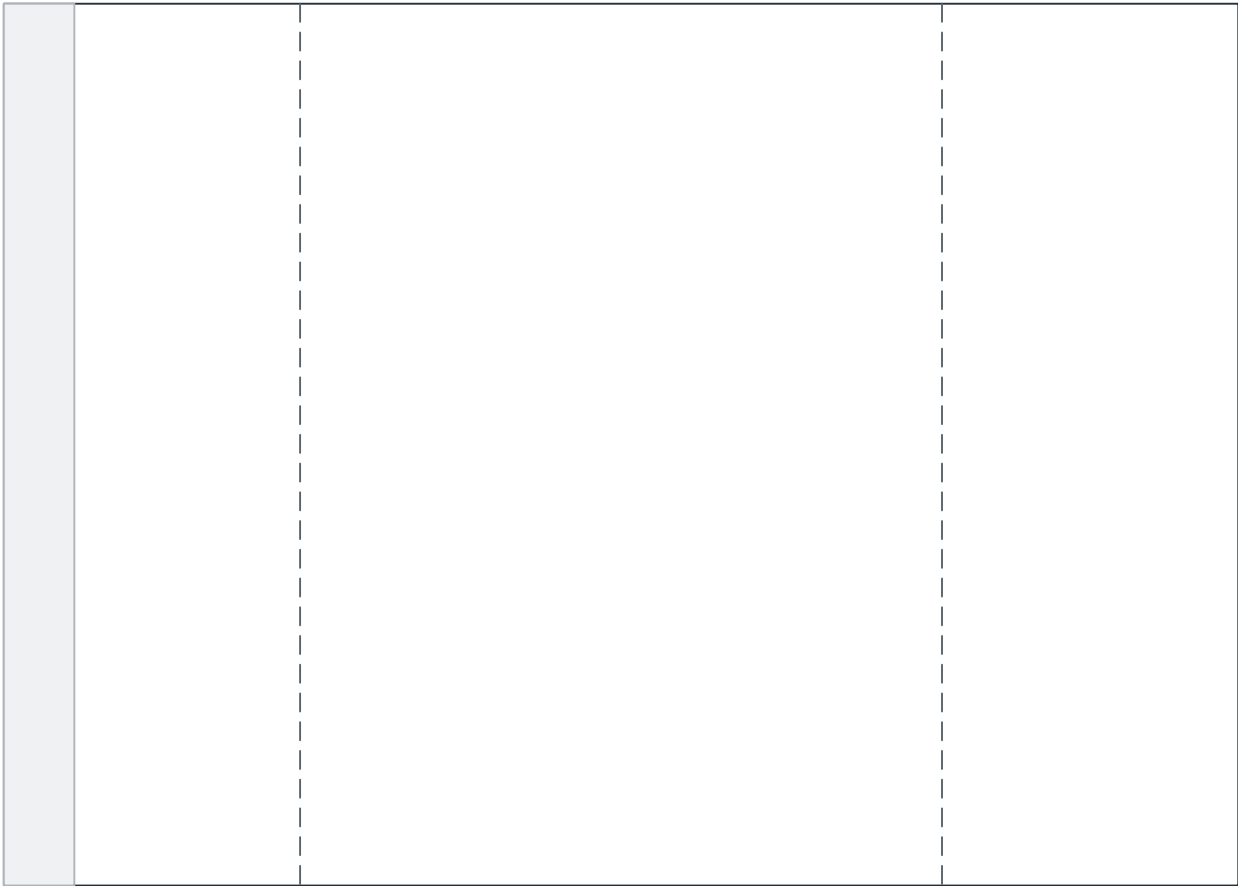


1. Pattern 1

1 pattern sheet supplied. Printed details are not cut lines unless explicitly marked.

Solid cut boundary / dashed score / shaded joining area. Read the full instructions.

Dry-fit the parts before gluing. Keep this overview beside the full-size pattern sheets.




Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

Vellum invitation wrap pattern

gif-045 / A4 / Pattern 1

Invitation wrap

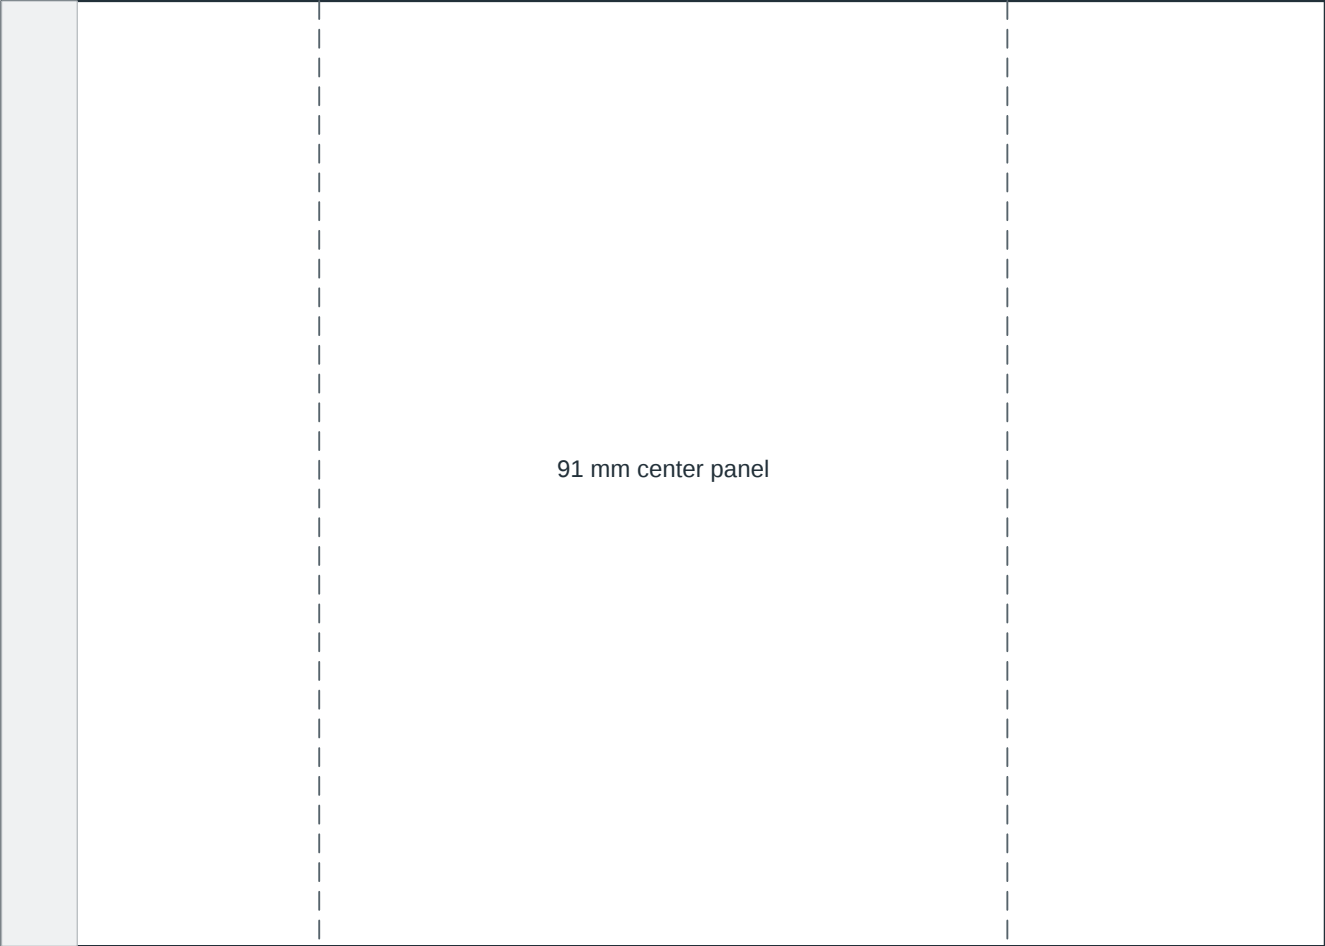

Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

Vellum invitation wrap pattern

gif-045 / A4 / Instructions

PURPOSE

Vellum invitation wrap pattern developed as a fixed-size paper pattern with separate cut, fold and joining marks. Use the stated drawing sizes and make an empty trial before choosing material or contents.

DRAWING FACTS

- Wrap blank: 175 x 125 mm; center panel 91 mm; two 42 mm side panels.

MATERIALS


Plain paper for a first trial, a ruler, scissors and a blunt scoring tool; adult help for internal cuts.

HOW TO USE THESE PAGES

1. Choose printer-compatible paper, cut the 175 x 125 mm blank and score at 42 and 133 mm.
2. Place a plain trial invitation over the 91 mm center panel and fold both 42 mm side panels inward. Their edges leave a nominal 7 mm opening; they do not overlap.
3. Hold the folded wrap with a separate removable paper band or ribbon. Do not glue the printed edge zone to the invitation.
4. Check that the invitation slides out and that ink does not transfer before using the intended paper.

LIMITS AND CHECKS

- Nominal drawing dimensions are not a tested usable-capacity, load, mailing, food-contact or archival specification.
- Do not place valuable, wet, hot or breakable items in an unreviewed paper prototype.
- Trial: Measure the 50 mm reference and at least two named panel dimensions.
- Trial: Assemble an empty plain-paper trial; record closure, seam, clearance and material behavior.



50 mm print check

Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.