


Heart-shaped two-piece box


gif-164 / LETTER / Parts overview - NOT A CUTTING SHEET

USE THE FOLLOWING PATTERN SHEETS AT ACTUAL SIZE.

These miniature views identify the supplied patterns; they are deliberately reduced.

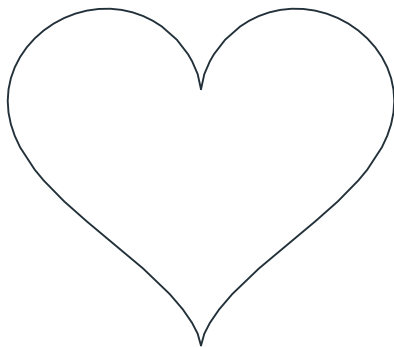

1. Pattern 1

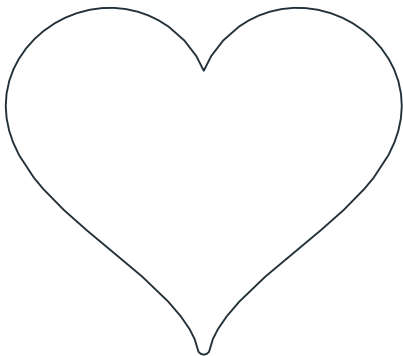


2. Pattern 2

2 pattern sheets supplied. Printed details are not cut lines unless explicitly marked.

Solid cut boundary / dashed score / shaded joining area. Read the full instructions.

Dry-fit the parts before gluing. Keep this overview beside the full-size pattern sheets.




50 mm print check

Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.


Heart-shaped two-piece box

gif-164 / LETTER / Pattern 1

Body face

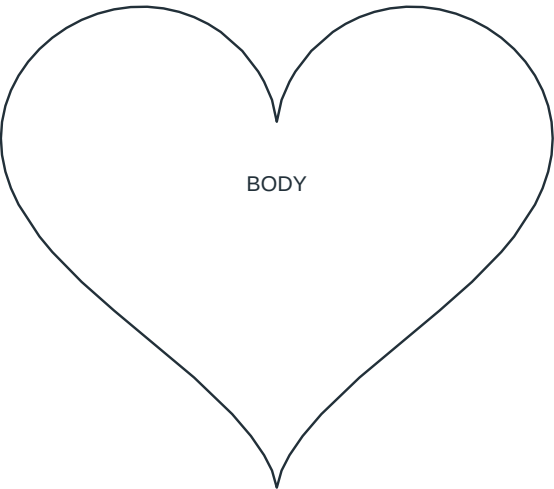

Body wall band 1/2

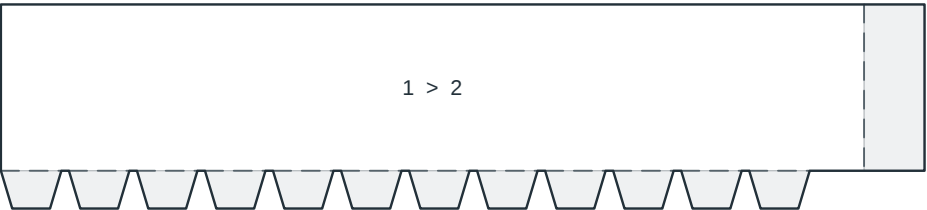

Body wall band 2/2




Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

Heart-shaped two-piece box

gif-164 / LETTER / Pattern 2


Lid face

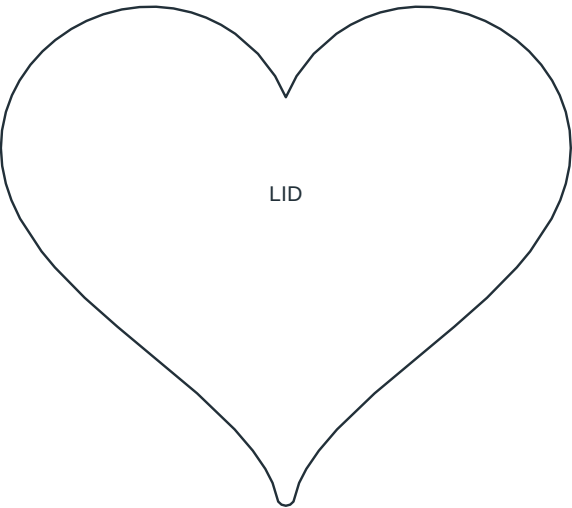

Lid wall band 1/2



Lid wall band 2/2



Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

Heart-shaped two-piece box

gif-164 / LETTER / Instructions

PURPOSE

Heart-shaped two-piece box developed as a fixed-size paper pattern with separate cut, fold and joining marks. Use the stated drawing sizes and make an empty trial before choosing material or contents.

DRAWING FACTS

- Body face: 73.00 x 63.62 mm; traced perimeter 228.38 mm; wall depth 22 mm.
- Lid face: 75.39 x 66.02 mm; traced perimeter 230.38 mm; wall depth 12 mm.

MATERIALS

Plain paper for a first trial, a ruler, scissors and a blunt scoring tool; adult help for internal cuts.

HOW TO USE THESE PAGES

1. Cut each face and numbered band with its small tabs attached. Score the tab hinges.
2. Join each matching set of numbered bands at the 8 mm seams, in the printed order. Keep Body and Lid sets separate.
3. Curve the wall strip around its matching face. Crease at actual outline corners and fit the small tabs behind the face before applying adhesive.
4. Glue the tabs to the back of the Body face. Assemble the separate larger Lid face and its shorter wall strip the same way, then let both pieces dry before fitting the lid.
5. Check every seam and corner on an empty trial. Do not stretch the band or force a tight lid to conceal a mismatch.

LIMITS AND CHECKS

- Nominal drawing dimensions are not a tested usable-capacity, load, mailing, food-contact or archival specification.
- Do not place valuable, wet, hot or breakable items in an unreviewed paper prototype.
- Trial: Measure the 50 mm reference and at least two named panel dimensions.
- Trial: Assemble an empty plain-paper trial; record closure, seam, clearance and material behavior.



50 mm print check

Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.