
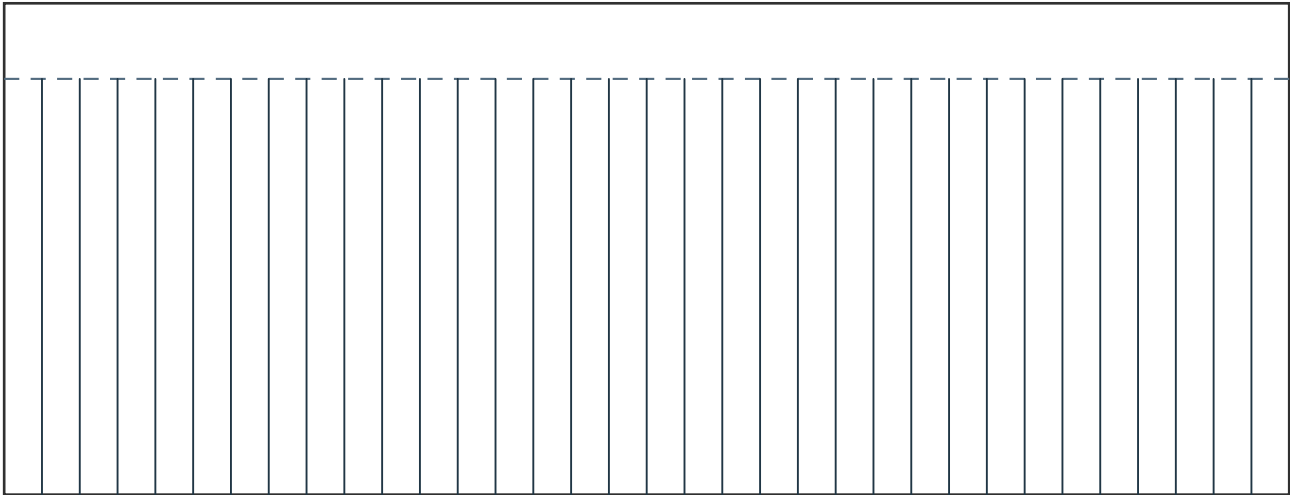


Fringed paper tassels

Fringe cuts stop at the dashed 10 mm rail

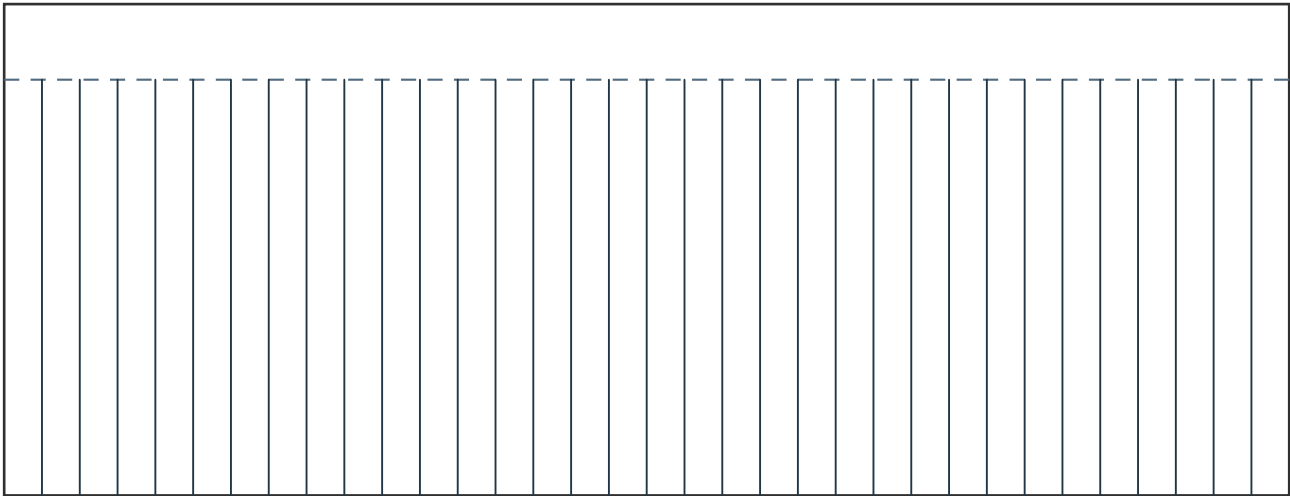

50 mm scale check | Measure after printing

Fringed paper tassels

Assembly / solid = cut / dashed = fold

MAKE THE PROJECT

Two 170 x 65 mm fringe strips with 5 mm fringe spacing and a 10 mm uncut rail.

YOU WILL NEED

Paper, scissors, ruler and adhesive; optional hanging loop.

- 01 Cut the two outer rectangles. For each one, cut all fringe lines from the bottom only as far as the dashed 10 mm rail.
- 02 Keep the rail flat and uncut. Apply a thin line of adhesive to its reverse.
- 03 Roll from one short end to the other, keeping the top rail even. Add a paper or cord loop inside the first turn only when you have tested its attachment.
- 04 Let the roll dry, then separate the fringe gently. Use as a paper decoration and keep loops away from young children.

Try the pattern on ordinary paper first. Paper thickness, folds and joins affect the result. The digital layout is checked; physical assembly and durability remain untested.

