


Twisted easel card base

pap-090 / LETTER / Parts overview - NOT A CUTTING SHEET

USE THE FOLLOWING PATTERN SHEETS AT ACTUAL SIZE.

These miniature views identify the supplied patterns; they are deliberately reduced.

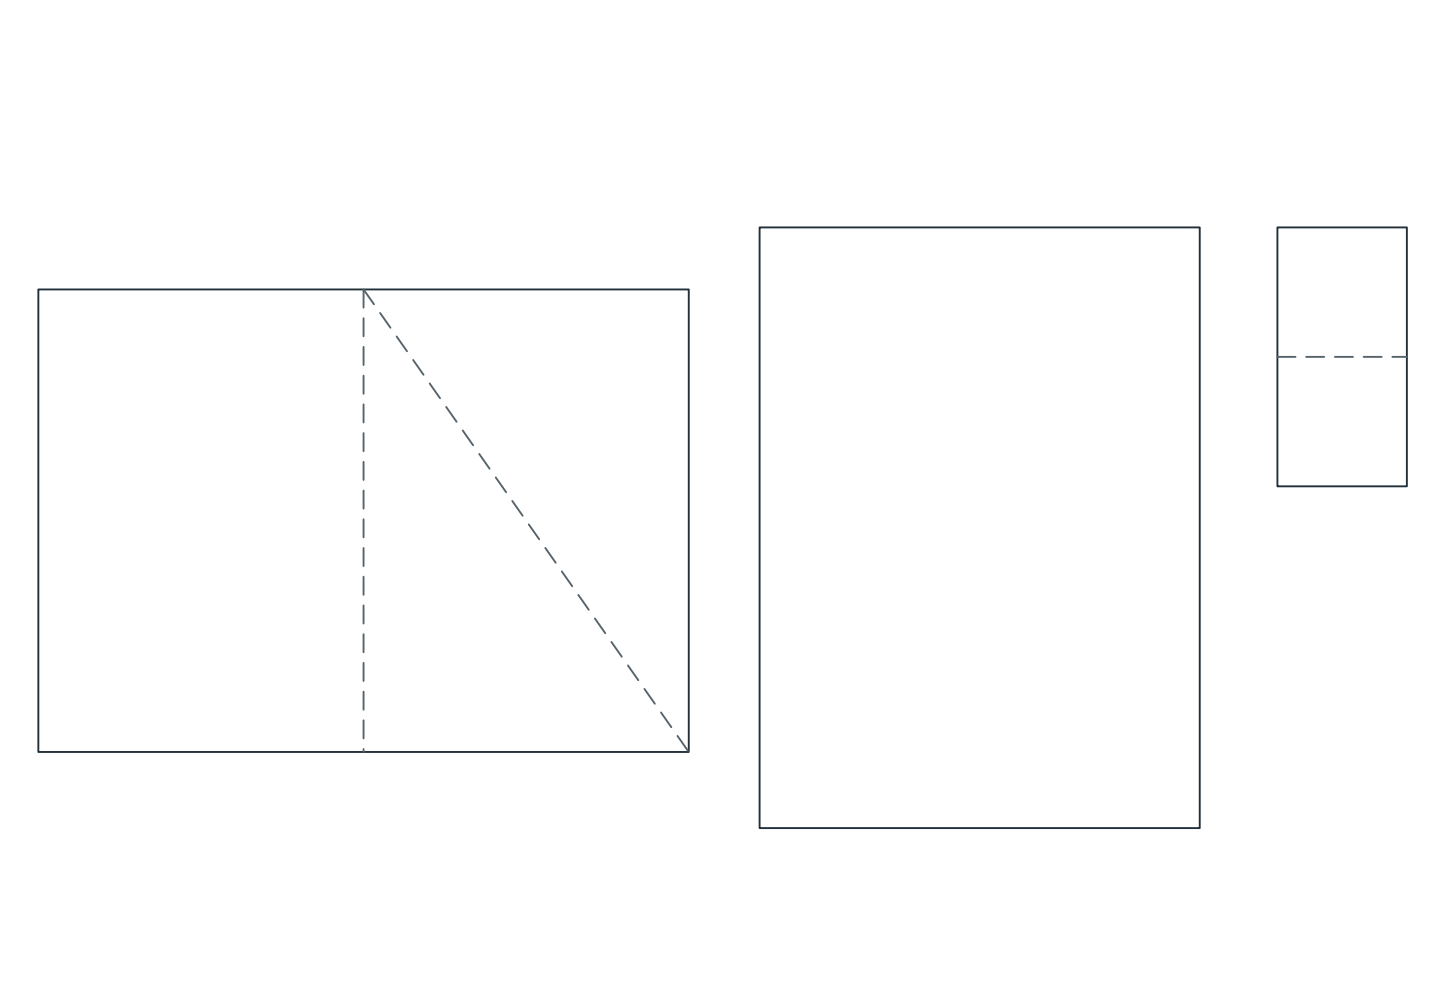


1. Pattern 1

2. Pattern 2

2 pattern sheets supplied. Printed details are not cut lines unless explicitly marked.

Solid cut boundary / dashed score / shaded joining area. Read the full instructions.

Dry-fit the parts before gluing. Keep this overview beside the full-size pattern sheets.




Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

Twisted easel card base

pap-090 / LETTER / Pattern 1

Twisted-Easel base


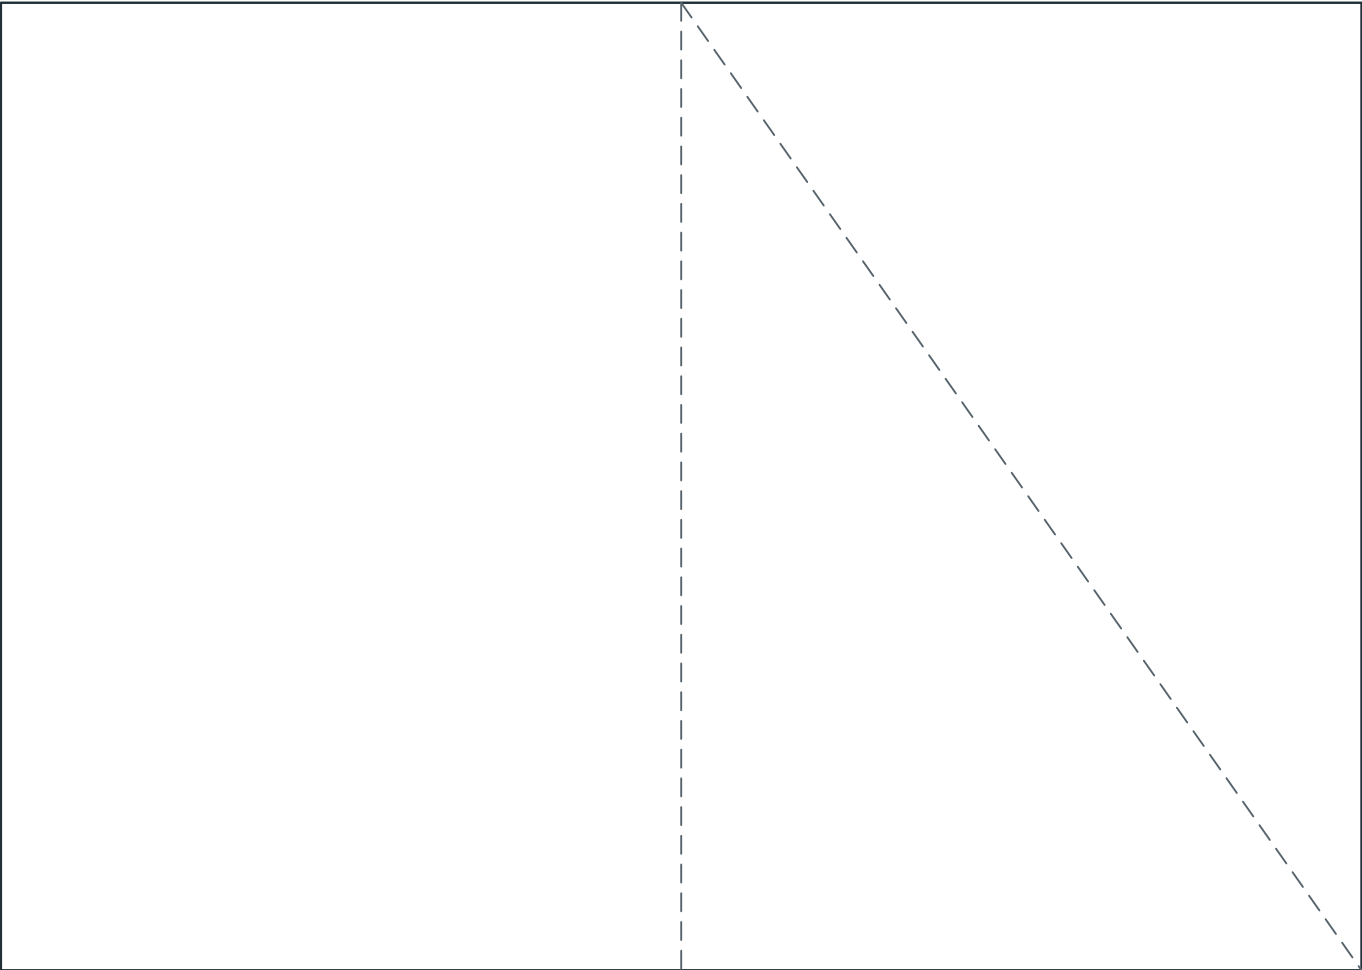


Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

Twisted easel card base

pap-090 / LETTER / Pattern 2

Easel display and stop



Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

Twisted easel card base

pap-090 / LETTER / Instructions

PURPOSE

Twisted easel card base developed as a measured original paper study. The packet provides the actual parts, joining or shaping marks, drawing dimensions and an assembly sequence. Print at actual size and dry-fit the parts before gluing.

DRAWING FACTS

- 180 x 128 mm base; half-width hinge at 90 mm; diagonal easel fold across the front panel.

MATERIALS

Plain 100 to 140 gsm paper for a first dimensional trial; approximately 160 to 220 gsm card only after confirming the folds. Use a ruler, suitable scissors, a blunt scoring tool and a small amount of paper adhesive. An adult should handle internal cuts, holes and small fasteners.

HOW TO USE THESE PAGES

1. Score the center hinge and the front-panel diagonal.
2. Fold the base in half, then fold the front along the diagonal to raise one triangular support.
3. Bond the separate display panel to the lower support triangle only.
4. Place the folded stopper on the bottom half at the point where the display stands comfortably; test before bonding.

LIMITS AND CHECKS

- Drawing dimensions describe flat paper surfaces, not verified internal capacity, load strength, fit or material compatibility.
- No mailing, food-contact, archival, toy-safety, protective-wear or cutting-machine certification is supplied.
- Make a plain-paper trial first; paper thickness and fold accuracy can change the fit.
- Trial: Measure the 50 mm reference and two named component dimensions.
- Trial: Make a complete empty trial and document fold direction, joining order, collision, stability and any fragile features.
- Trial: Repeat the trial using your chosen paper. Check that every join holds and each moving part works freely before decorating.



50 mm print check

Print at actual size / 100%. Disable fit-to-page.

Use the paper edition that matches the printer tray.