


Miniature A-frame cabin

pap-117 / LETTER / Parts overview - NOT A CUTTING SHEET

USE THE FOLLOWING PATTERN SHEETS AT ACTUAL SIZE.

These miniature views identify the supplied patterns; they are deliberately reduced.

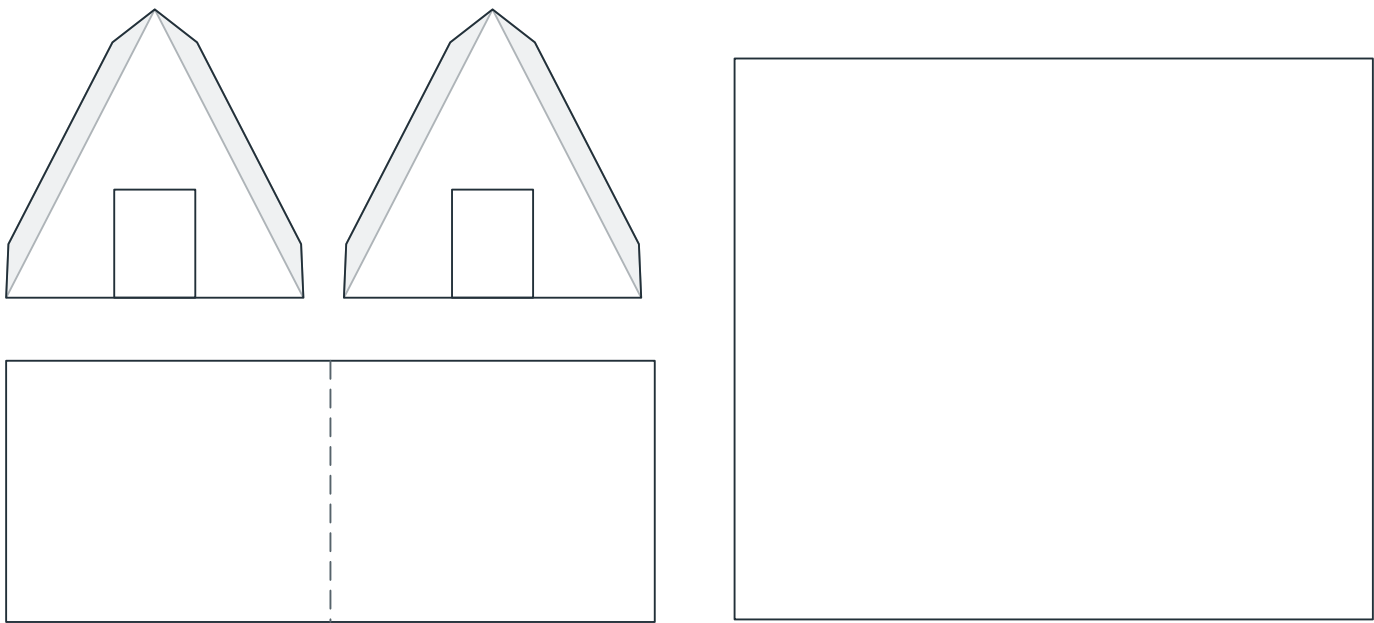

1. Pattern 1

2. Pattern 2

2 pattern sheets supplied. Printed details are not cut lines unless explicitly marked.

Solid cut boundary / dashed score / shaded joining area. Read the full instructions.

Dry-fit the parts before gluing. Keep this overview beside the full-size pattern sheets.




Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.


Miniature A-frame cabin

pap-117 / LETTER / Pattern 1

A-frame end 1

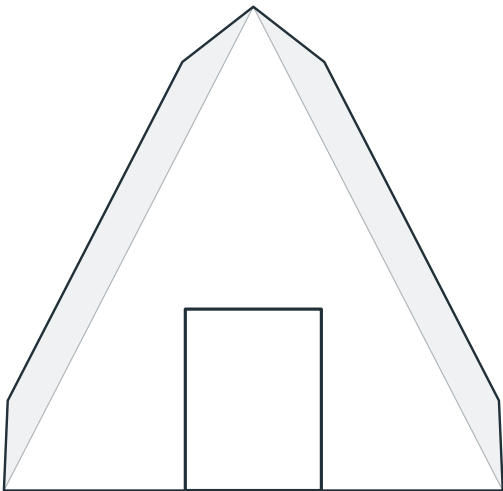

A-frame end 2

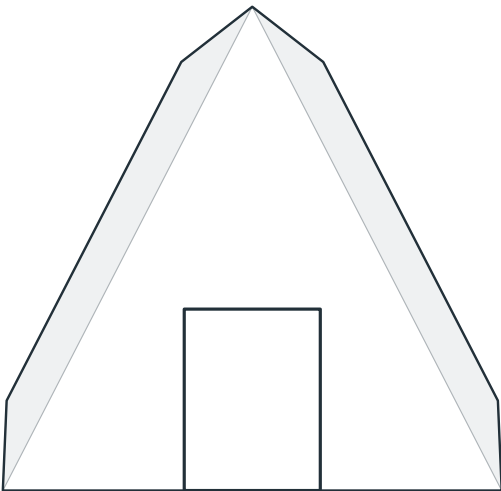

A-frame folded roof




Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

Miniature A-frame cabin

pap-117 / LETTER / Pattern 2

A-frame floor



Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

Miniature A-frame cabin

pap-117 / LETTER / Instructions

PURPOSE

Miniature A-frame cabin developed as a measured original paper study. The packet provides the actual parts, joining or shaping marks, drawing dimensions and an assembly sequence. Print at actual size and dry-fit the parts before gluing.

DRAWING FACTS

- A-frame span 66 mm; rise 64 mm; depth 58 mm. Each roof slope 72.007 mm.

MATERIALS

Plain 100 to 140 gsm paper for a first dimensional trial; approximately 160 to 220 gsm card only after confirming the folds. Use a ruler, suitable scissors, a blunt scoring tool and a small amount of paper adhesive. An adult should handle internal cuts, holes and small fasteners.

HOW TO USE THESE PAGES

1. Cut two triangular ends, the roof and floor. Keep the five-millimeter roof tabs attached.
2. Score the roof ridge and the end tabs. Bond the end panels to the exact slope edges, one end at a time.
3. Dry-fit and attach the floor after the shell holds its shape.
4. This is a display model with no load or weather resistance rating.

LIMITS AND CHECKS

- Drawing dimensions describe flat paper surfaces, not verified internal capacity, load strength, fit or material compatibility.
- No mailing, food-contact, archival, toy-safety, protective-wear or cutting-machine certification is supplied.
- Make a plain-paper trial first; paper thickness and fold accuracy can change the fit.
- Trial: Measure the 50 mm reference and two named component dimensions.
- Trial: Make a complete empty trial and document fold direction, joining order, collision, stability and any fragile features.
- Trial: Repeat the trial using your chosen paper. Check that every join holds and each moving part works freely before decorating.



50 mm print check

Print at actual size / 100%. Disable fit-to-page.

Use the paper edition that matches the printer tray.