


Earring Display Stand package specialty project

ex2-1250 / A4 / Parts overview - NOT A CUTTING SHEET

USE THE FOLLOWING PATTERN SHEETS AT ACTUAL SIZE.

These miniature views identify the supplied patterns; they are deliberately reduced.

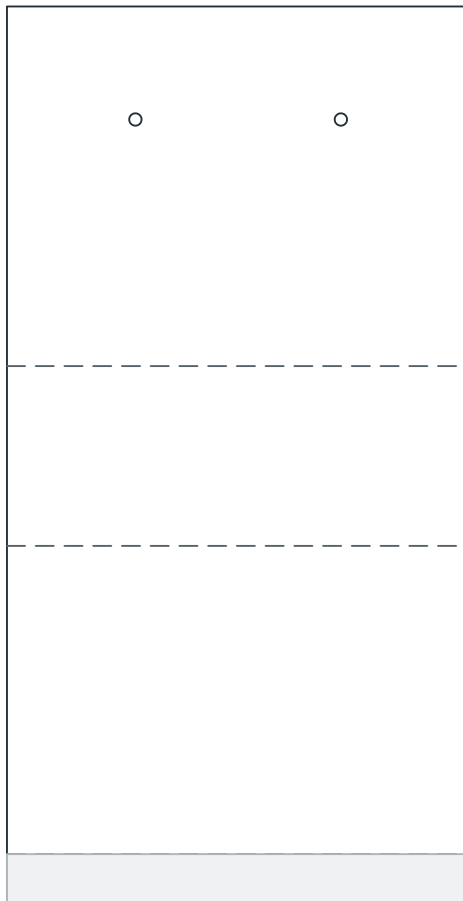


1. Pattern 1

1 pattern sheet supplied. Printed details are not cut lines unless explicitly marked.

Solid cut boundary / dashed score / shaded joining area. Read the full instructions.

Dry-fit the parts before gluing. Keep this overview beside the full-size pattern sheets.




Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

Earring Display Stand package specialty project

ex2-1250 / A4 / Pattern 1

Earring Stand



Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

Earring Display Stand package specialty project

ex2-1250 / A4 / Instructions

PURPOSE

Earring Display Stand package specialty project developed as a fixed-size paper pattern with separate cut, fold and joining marks. Use the stated drawing sizes and make an empty trial before choosing material or contents.

DRAWING FACTS

- Stand blank: 90 x 175 mm; fold segments 70, 35, 60 and 10 mm. Two 2.4 mm display holes.

MATERIALS


Plain paper for a first trial, a ruler, scissors and a blunt scoring tool; adult help for internal cuts.

HOW TO USE THESE PAGES

1. Cut the 90 x 175 mm blank and both small display holes. Score the three marked folds.
2. Fold the 70, 35 and 60 mm panels into a triangular stand, with the 35 mm panel as its base. Glue the final 10 mm tab behind the starting edge.
3. Let the stand dry flat on its base. Place only an expendable lightweight sample through the holes and check balance before leaving it upright.

LIMITS AND CHECKS

- Nominal drawing dimensions are not a tested usable-capacity, load, mailing, food-contact or archival specification.
- Do not place valuable, wet, hot or breakable items in an unreviewed paper prototype.
- Trial: Measure the 50 mm reference and at least two named panel dimensions.
- Trial: Assemble an empty plain-paper trial; record closure, seam, clearance and material behavior.



50 mm print check

Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.