


No-glue fold-flat gift box

gif-177 / LETTER / Parts overview - NOT A CUTTING SHEET

USE THE FOLLOWING PATTERN SHEETS AT ACTUAL SIZE.

These miniature views identify the supplied patterns; they are deliberately reduced.

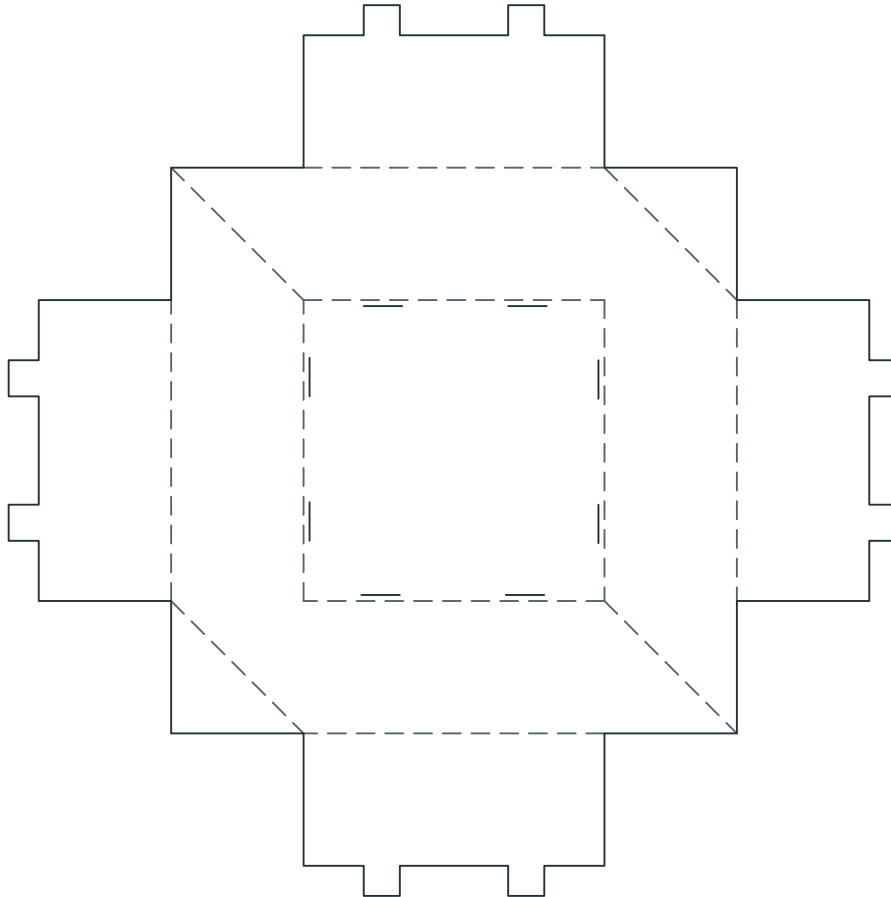

1. Pattern 1

1 pattern sheet supplied. Printed details are not cut lines unless explicitly marked.

Solid cut boundary / dashed score / shaded joining area. Read the full instructions.

Dry-fit the parts before gluing. Keep this overview beside the full-size pattern sheets.




Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

No-glue fold-flat gift box

gif-177 / LETTER / Pattern 1

Rolled-wall locking tray

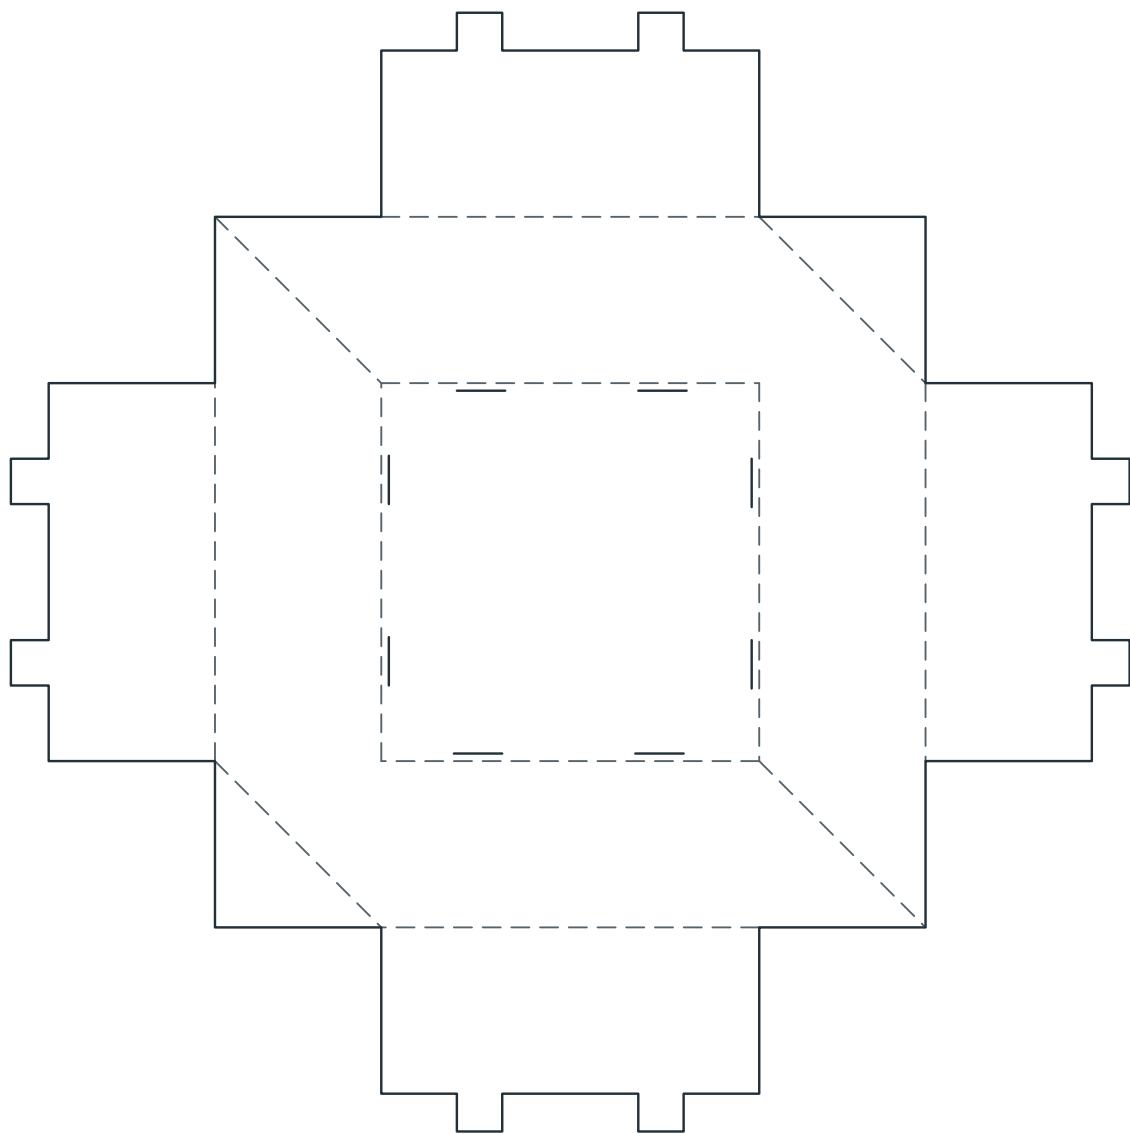

Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.

No-glue fold-flat gift box

gif-177 / LETTER / Instructions

PURPOSE

No-glue fold-flat gift box developed as a fixed-size paper pattern with separate cut, fold and joining marks. Use the stated drawing sizes and make an empty trial before choosing material or contents.

DRAWING FACTS

- Base panel: 50 x 50 mm; walls 22 mm with 22 mm return panels.
- Locking tongues: 6 x 5 mm; matching slots: 6.4 mm long.

MATERIALS

Plain paper for a first trial, a ruler, scissors and a blunt scoring tool; adult help for internal cuts.

HOW TO USE THESE PAGES

1. Cut the full net, tongues and base slots. Score wall hinges, return hinges and corner diagonals.
2. Raise opposite walls and fold their diagonal corner squares inward.
3. Roll each outer wall over its corner tabs along the return hinge.
4. Tuck the 6 mm tongues into the corresponding base slots without adhesive. Do not split the base to force a fit.
5. Check all four locks and the flat base on a plain trial before selecting stronger card. Closure remains unverified until physically exercised.

LIMITS AND CHECKS

- Nominal drawing dimensions are not a tested usable-capacity, load, mailing, food-contact or archival specification.
- Do not place valuable, wet, hot or breakable items in an unreviewed paper prototype.
- Trial: Measure the 50 mm reference and at least two named panel dimensions.
- Trial: Assemble an empty plain-paper trial; record closure, seam, clearance and material behavior.



50 mm print check

Print at actual size / 100%. Disable fit-to-page.
Use the paper edition that matches the printer tray.